



Your service garage,
our offer.



Check out from page 24


Your body workshop,
our best fit.



Check out from page 54



Piston compressor
mounted on vertical receiver
Airnet
Pneumatic tools

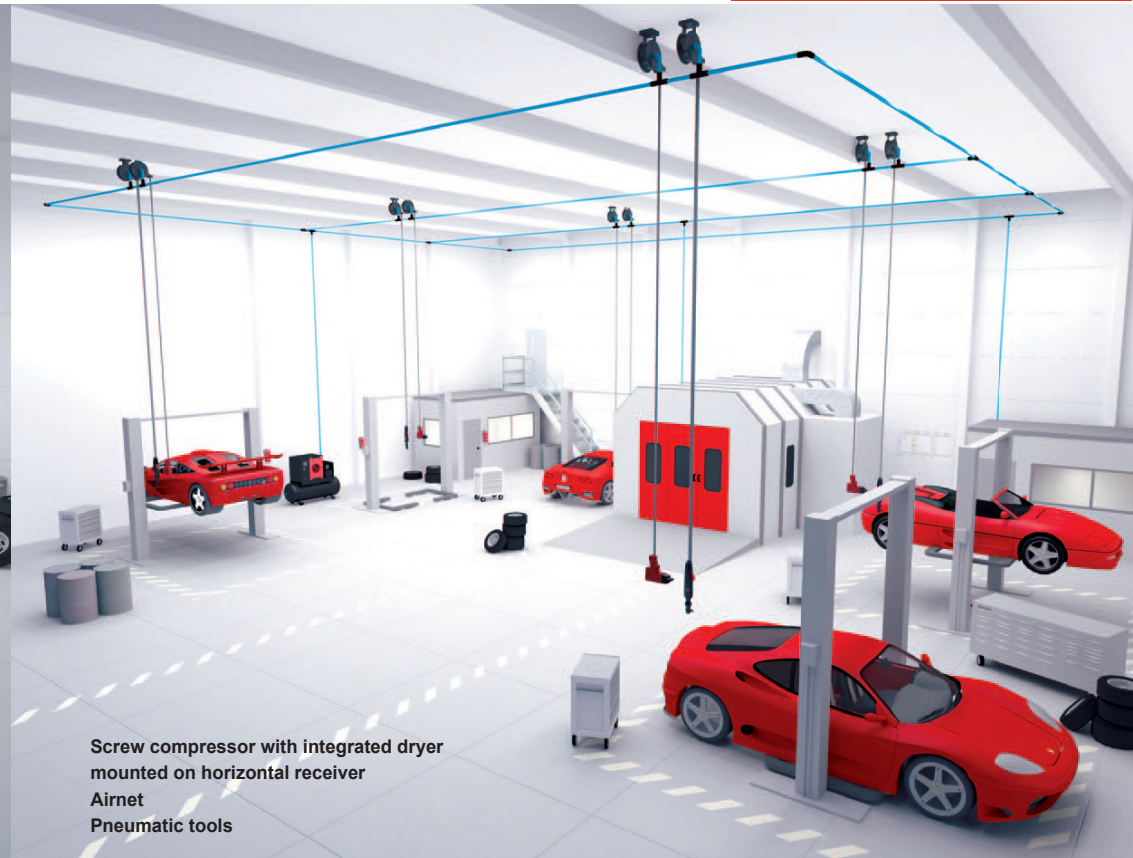

Screw compressor with integrated dryer
mounted on horizontal receiver
Airnet
Pneumatic tools

Light and basic oilless operation

Direct driven oilless compressors

Easy and simple oilless operation.

- small and compact, so these unit be stored easily
- light and no oil
- user-friendly operation with clear guages and regulators
- straightfoward use

Suited for mobile workbench



Blowing gun



Small and compact



Easy to operate

CPRB O15 PS

Partnumber 4116023471

Technology	Piston 8 bar
Use	Short time duty
Air quality	Oilless
Noise level	Standard
Vessel size	0l

CPRB 6 O15 PS

Partnumber 4116023472

Technology	Piston 8 bar
Use	Short time duty
Air quality	Oilless
Noise level	Standard
Vessel size	6l



Easy to carry



Safe draining



CPRB 24 O15 MS

Partnumber 4116023473

Technology	Piston 8 bar
Use	Short time duty
Air quality	Oilless
Noise level	Standard
Vessel size	24l



Clear and big gauges



User-friendly to adapt pressure



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116023471	CPRB O15 PS	1	0	180	6,4	10,8	1,5	1,1	3400	230/50	1	8	116	280 x 180 x 347	4,5/10
4116023472	CPRB 6 O15 PS	1	6	180	6,4	10,8	1,5	1,1	3400	230/50	1	8	116	330 x 360 x 350	9,5/21
4116023473	CPRB 24 O15 MS	1	24	180	6,4	10,8	1,5	1,1	3400	230/50	1	8	116	250 x 565 x 420	20/44



The quick fix device

Direct driven oil lubricated compressors

Short tasks to complete and small things to repair? These DIY compressors match your demands

- Small size, outstanding results
- Perfectly moveable thanks to the large handle and big wheels
- Improved performance and extended service life due to splash lubrication
- Safety first with thermal overheating motor protection

Suited for mobile workbench



Ratchet CP7828H

CPRA 24 L20 MS

Partnumber 4116023478

Technology	Piston 8 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	24l



Light handling



Easy to move



CPRA 50 L20 MS

Partnumber 4116023479

Technology	Piston 8 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	50l



Easy to move



Large fin, great cooling, less wear



Partnumber	Type	Comp.	Liters	l/m	cfm	m ³ /h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116023477	CPRA 6 L20 PS	1	6	222	7,8	13,3	2,0	1,5	2850	230/50	1	8	116	535 x 215 x 535	18/57
4116023478	CPRA 24 L20 MS	1	24	222	7,8	13,3	2,0	1,5	2850	230/50	1	8	116	570 x 255 x 590	25/79
4116023479	CPRA 50 L20 MS	1	50	222	7,8	13,3	2,0	1,5	2850	230/50	1	8	116	770 x 310 x 645	33/53

Advanced oilless range

Direct driven oilless compressors


Compact and trouble free use for smart car and home maintenance tasks

- Oilless units, so no worrying about spilling oil or complicated maintenance
- Safety first thanks to thermal overheating motor protection
- Ergonomical handle and big wheels for light transportation

Suited for mobile workbench



Spray paint gun

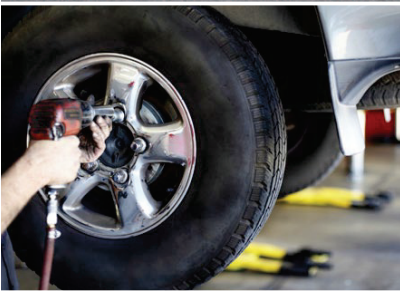

CPRB 6 O20P PS

Partnumber 4116023474

Technology	Piston 8 bar
Use	Short time duty
Air quality	Oilless
Noise level	Standard
Vessel size	6l



Easy and ergonomic transportation



No oil spillage



CPRB 24 O20P MS

Partnumber 4116023475

Technology	Piston 8 bar
Use	Short time duty
Air quality	Oilless
Noise level	Standard
Vessel size	24l



Easy to move



Easy to read and operate



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116023474	CPRB 6 O20P PS	1	6	230	8,1	13,8	2,0	1,5	2850	230/50	1	8	116	535 x 215 x 535	16/35
4116023475	CPRB 24 O20P MS	1	24	230	8,1	13,8	2,0	1,5	2850	230/50	1	8	116	570 x 250 x 590	25/55
4116023476	CPRB 50 O20P MS	1	50	230	8,1	13,8	2,0	1,5	2850	230/50	1	8	116	770 x 310 x 645	30/66


Top DIY range

Direct driven oil lubricated compressors

Great performance at 10 bar with these high end units

- Wide range of applications thanks to the powerfull pumps
- Double outlet, one regulated, for great flexibility of use
- Safety first with thermal overheating motor protection and automatic reset
- Light and easy to move

Suited for mobile workbench

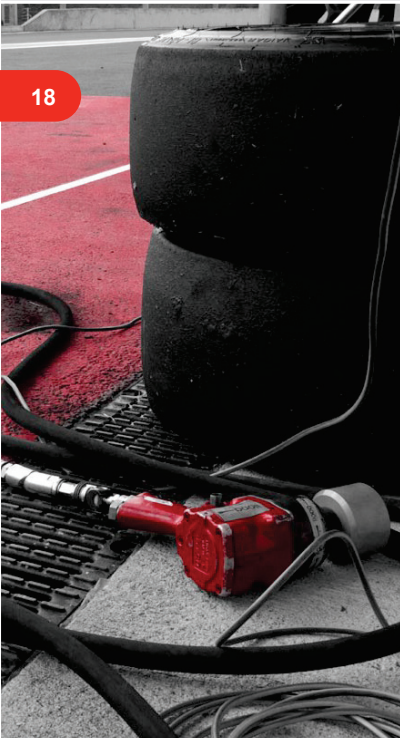

Ratchet CP9426

CPRA 24 L20P MS

Partnumber 4116023480

Technology	Piston 10 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	24l



Easy to pull



Easy to move



Reliability with big cooling fins



CPRA 50 L30P MS

Partnumber 4116023483

Technology	Piston 10 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	50l



Easy to read and regulate



Stable and safe operation

Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116023480	CPRA 24 L20P MS	1	24	240	8,5	14,4	2,0	1,5	2850	230/50	1	10	145	570 x 255 x 590	25/55
4116023481	CPRA 50 L20P MS	1	50	240	8,5	14,4	2,0	1,5	2850	230/50	1	10	145	770 x 310 x 645	31/68
4116023482	CPRA 24 L30P MS	1	24	310	10,9	18,6	3,0	2,2	2850	230/50	1	10	145	570 x 255 x 590	33/73
4116023483	CPRA 50 L30P MS	1	50	310	10,9	18,6	3,0	2,2	2850	230/50	1	10	145	770 x 310 x 645	37/82
4116023484	CPRA 100 L30P MS	1	100	310	10,9	18,6	3,0	2,2	2850	230/50	1	10	145	1060 x 385 x 730	48/106



Easy robustness

Belt driven 1 stage compressors

Easy, but efficient and powerfull for more demanding use

- Safety first with robust metal belt guard
- Large fins, great cooling, less wear
- Great moveability thanks to front pivot wheel on larger units
- Efficient power with electric motor

Suited for mobile workbench




Impact screwdriver CP2036

CPRC 250 NS12 MS

Partnumber 4116023630

Technology	Piston 10 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	50l



Safe and robust



Easy maintenance



CPRC 290 NS12 MS

Partnumber 4116023631

Technology	Piston 10 bar
Use	Short time duty
Air quality	Standard
Noise level	Standard
Vessel size	90l



Moveability



Flexibility

Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116023630	CPRC 250 NS12 MS	1	50	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	805 x 365 x 690	48/106
4116024582	CPRC 250 NS12 MT	1	50	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	805 x 365 x 690	48/106
4116023631	CPRC 290 NS12 MS	1	90	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	985 x 395 x 820	62/136
4116024603	CPRC 290 NS12 MT	1	90	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	985 x 395 x 820	62/136



Straightforward car servicing

Direct driven oil lubricated compressors

Transportable compactness with V-shaped power

- Two cylinder pump for large airflow and demanding applications
- Large fins and fan blades, great cooling, less wear
- Workshop comfort with lower noise, small footprints and rubber handles
- Safety first: fan cover and rubber feet for maximum stability

Suited for mobile workbench

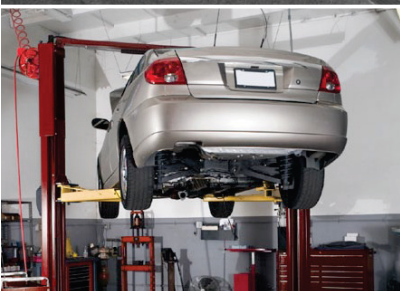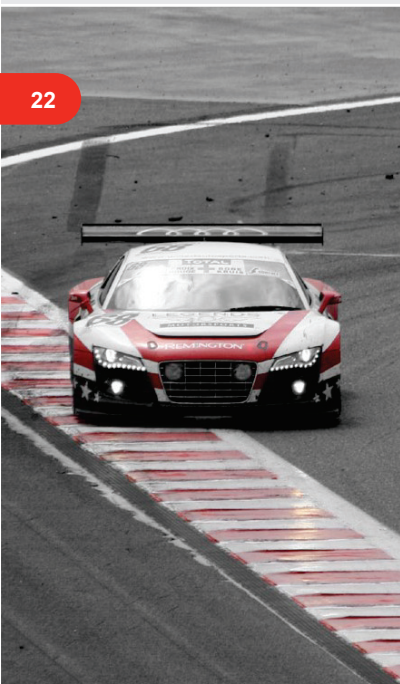


Impact wrench 3/8 CP724H



CPRA 324 GV34 MS

Partnumber 4116022822

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	24l



Extra grip comfort

CPRA 322 GV34 MS

Partnumber 4116022829

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	11+11l



Moveability



Stability




Tray with non slip surface



CPRA 350 GV34 VS

Partnumber 4116022830

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	50l



Small footprint



Moveable stability

Partnumber	Type	Comp.	Liters	l/m	cfm	m ³ /h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116022822	CPRA 324 GV34 MS	1	24	340	12,0	20,4	3,0	2,2	1450	230/50	1	10	145	480 x 640 x 740	50/110
4116022823	CPRA 324 GV34 MT	1	24	340	12,0	20,4	3,0	2,2	1450	230/50	3	10	145	480 x 640 x 740	50/110
4116022824	CPRA 350 GV34 MS	1	50	340	12,0	20,4	3,0	2,2	1450	230/50	1	10	145	830 x 420 x 770	54/119
4116022825	CPRA 350 GV34 MT	1	50	340	12,0	20,4	3,0	2,2	1450	230/50	3	10	145	830 x 420 x 770	54/119
4116022826	CPRA 390 GV34 MS	1	90	340	12,0	20,4	3,0	2,2	1450	230/50	1	10	145	1080 x 445 x 890	77/170
4116022827	CPRA 390 GV34 MT	1	90	340	12,0	20,4	3,0	2,2	1450	230/50	3	10	145	1080 x 445 x 890	77/170
4116022828	CPRA 3200 GV34 MT	1	200	340	12,0	20,4	3,0	2,2	1450	230/50	3	10	145	1500 x 450 x 890	97/214
4116022829	CPRA 322 GV34 MS	1	11+11	340	12,0	20,4	3,0	2,2	1450	230/50	1	10	145	650 x 790 x 670	60/132
4116022830	CPRA 350 GV34 VS	1	50	340	12,0	20,4	3,0	2,2	1450	230/50	1	10	145	520 x 520 x 960	50/110



Portable partnership for small workshops

Belt driven 1 stage compressors
Base plate compressors

Reliable quality performance

- Longer compressor lifetime due to less heat: large cooling fins and specially designed flywheel
- Enhanced tools efficiency and reliability with aluminium aftercooler
- Both moveability and stability: large wheels and double front feet or blockable wheels
- Safety first with robust metal belt guard and rubber handle

Suited for mobile workbench



Impact wrench 1/2 CP7749


CPRC 250 NS12S MS

Partnumber 4116024326


Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	50l



Stability



Moveability



Lower air temperature enhances tools efficiency



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116024324	CPRC 227 NS12S MS	1	27	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	830 x 370 x 710	46/101
4116024325	CPRC 227 NS12S MT	1	27	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	830 x 370 x 710	46/101
4116024326	CPRC 250 NS12S MS	1	50	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	780 x 370 x 780	55/121
4116024327	CPRC 250 NS12S MT	1	50	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	780 x 370 x 780	55/121
4116024328	CPRC 290 NS12S MS	1	90	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	1000 x 410 x 820	67/147
4116024329	CPRC 290 NS12S MT	1	90	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	1000 x 410 x 820	67/147
4116024330	CPRC 390 NS12S MS	1	90	320	11,3	19,2	3,0	2,2	1350	230/50	1	10	145	1000 x 410 x 900	69/152
4116024331	CPRC 390 NS12S MT	1	90	320	11,3	19,2	3,0	2,2	1350	400/50	3	10	145	1000 x 410 x 900	69/152
4116024332	CPRC 3150 NS12S MS	1	150	320	11,3	19,2	3,0	2,2	1350	230/50	1	10	145	1380 x 420 x 950	85/187
4116024333	CPRC 3150 NS12S MT	1	150	320	11,3	19,2	3,0	2,2	1350	400/50	3	10	145	1380 x 420 x 950	85/187
4116024334	CPRC 3200 NS12S MS	1	200	320	11,3	19,2	3,0	2,2	1350	230/50	1	10	145	1500 x 450 x 960	129/284
4116074062	CPRF 20 NS12 BTT	1	0	320	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	640 x 320 x 360	28/62

CPRC 290 NS12S MS

Partnumber 4116024328



Simultaneous use

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	90l

Low noise solutions for small workshops

Silent compressors
Cast iron compressors

Workshop comfort and installation close to workbench

- Super silenced units with sound proof cabinet, and silent cast iron units running at low speed
- Safety first: fire proof insulating foam on canopy units, and metal belt guard on cast iron units
- Easy maintenance: immediate access to all mechanical and electrical components
- Enhanced tools efficiency and reliability with air flow designed for optimal air temperature

Suited for 2 operators




Impact wrench 3/4 CP9560

CPRS 327 NS12S FT

Partnumber 4116074066

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Silent
Vessel size	27l integrated




Easy maintenance



Clear indicators



Integrated 27l vessel




CPRK VE1 350 MS

Partnumber 4116023048

Technology	Piston 10 bar
Use	Intensive
Air quality	Standard
Noise level	Low
Vessel size	50l



Robust and reliable



Low speed, low wear

Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	Phase	bar	psi	L x W x H (mm)	Db(A)	kg/Lb
4116074063	CPRS 227 NS12 FS	1	27	255	9,0	15,3	2,0	1,5	1075	230/50	1	10	145	780 x 470 x 960	64	86/189
4116074064	CPRS 227 NS12 FT	1	27	255	9,0	15,3	2,0	1,5	1075	400/50	3	10	145	780 x 470 x 960	64	86/189
4116074065	CPRS 327 NS12S FS	1	27	320	11,3	19,2	3,0	2,2	1350	230/50	1	10	145	780 x 470 x 960	65	87/192
4116074066	CPRS 327 NS12S FT	1	27	320	11,3	19,2	3,0	2,2	1350	400/50	3	10	145	780 x 470 x 960	65	87/192
4116023048	CPRK VE1 350 MS	1	50	418	14,8	25,1	3,0	2,2	1100	230/50	1	10	145	1000 x 400 x 740	87	73/161
4116023049	CPRK VE1 3200 MS	1	200	418	14,8	25,1	3,0	2,2	1180	230/50	1	10	145	1400 x 450 x 980	89	111/245

Top performant partnership for small workshops

Belt driven 1 stage compressors

Bigger sizes for larger shops

- Longer compressor lifetime due to less heat: large cooling fins and specially designed flywheel
- Enhanced tools efficiency with aluminium aftercooler
- Safety first with robust metal belt guard and rubber handle
- Space saving solution with vertical vessel

Suited for 2 operators



Impact wrench 1/2 CP7749

Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116024348	CPRC 350 NS19S MS	1	50	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	940 x 410 x 800	57/126
4116024349	CPRC 350 NS19S MT	1	50	393	13,9	23,6	3,0	2,2	1050	400/50	3	10	145	940 x 410 x 800	57/126
4116024350	CPRC 390 NS19S MS	1	90	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	1000 x 410 x 900	71/156
4116024351	CPRC 390 NS19S MT	1	90	393	13,9	23,6	3,0	2,2	1050	400/50	3	10	145	1000 x 410 x 900	71/156
4116024352	CPRC 3150 NS19S MS	1	150	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	1380 x 420 x 950	87/192
4116024353	CPRC 3150 NS19S MT	1	150	393	13,9	23,6	3,0	2,2	1050	400/50	3	10	145	1380 x 420 x 950	87/192
4116024354	CPRC 3200 NS19S MS	1	200	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	1500 x 450 x 960	131/289
4116024355	CPRC 3200 NS19S MT	1	200	393	13,9	23,6	3,0	2,2	1050	400/50	3	10	145	1500 x 450 x 960	131/289
4116024356	CPRC 3270 NS19S MS	1	270	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	1530 x 600 x 1160	138/304
4116024357	CPRC 3270 NS19S MT	1	270	393	13,9	23,6	3,0	2,2	1050	400/50	3	10	145	1530 x 600 x 1160	138/304
4116024358	CPRC 4200 NS19S MT	1	200	486	17,2	29,2	4,0	3,0	1300	400/50	3	10	145	1500 x 450 x 960	136/300
4116024359	CPRC 4200 NS19S FT	1	200	486	17,2	29,2	4,0	3,0	1300	400/50	3	10	145	1500 x 450 x 960	133/293
4116024360	CPRC 4270 NS19S MT	1	270	486	17,2	29,2	4,0	3,0	1300	400/50	3	10	145	1530 x 600 x 1160	143/315
4116024361	CPRC 4270 NS19S FT	1	270	486	17,2	29,2	4,0	3,0	1300	400/50	3	10	145	1530 x 600 x 1160	140/308
4116024362	CPRC 3150 NS19S VS	1	150	393	13,9	23,6	3,0	2,2	1050	230/50	1	10	145	850 x 970 x 1950	160/353

CPRC 3200 NS19S MS

Partnumber 4116024354

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	200L



Easy maintenance



Simultaneous use



Space efficiency



Lower air temperature enhances tools efficiency

CPRC 3150 NS19S VS

Partnumber 4116024362

Technology	Piston 10 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	150L

The ultimate reference in car service

Belt driven 2 stage compressors

Top performance at 11 bar

- More air and higher pressure with dual compression
- High reliability thanks to motor performance, low wear cast iron cylinder, and stainless steel valve plates
- Safety first with the clear and userfriendly pressure switch and metal belt guard
- Enhanced tools efficiency and reliability with aluminium aftercooler, and extra intercooler on NS39 pump

Suited for 2 / 3 operators




Impact wrench 3/4 CP9560



CPRD 4200 NS29S MT

Partnumber 4116022856


Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	200l



Dual compression high air delivery



Safe and user-friendly

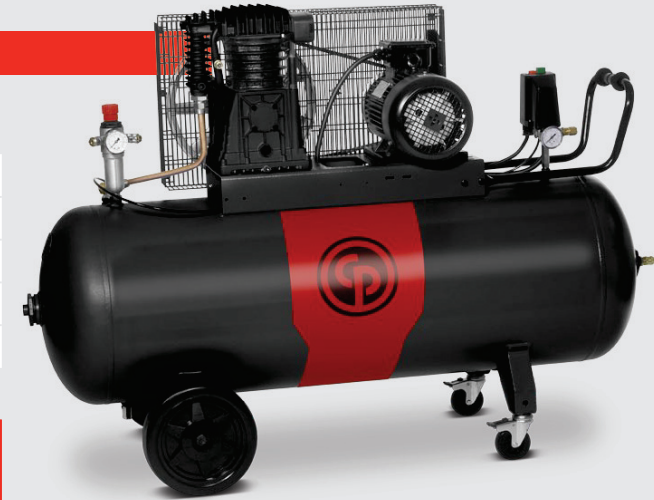

CPRD 6270 NS39 MT

Partnumber 4116022860

Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	270l



Lower air temperature enhances tools efficiency



Simultaneous use



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	vol/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116022856	CPRD 4200 NS29S MT	2	200	514	18,1	30,8	4,0	3,0	1400	400/50	3	11	160	1500 x 450 x 960	140/308
4116022857	CPRD 4200 NS29S FT	2	200	514	18,1	30,8	4,0	3,0	1400	400/50	3	11	160	1500 x 450 x 960	137/302
4116022858	CPRD 4270 NS29S MT	2	270	514	18,1	30,8	4,0	3,0	1400	400/50	3	11	160	1530 x 600 x 1160	147/324
4116022859	CPRD 4270 NS29S FT	2	270	514	18,1	30,8	4,0	3,0	1400	400/50	3	11	160	1530 x 600 x 1160	144/317
4116022860	CPRD 6270 NS39 MT	2	270	653	23,1	39,2	5,5	4,0	1000	400/50	3	11	160	1520 x 590 x 1260	180/397
4116022861	CPRD 6500 NS39 MT	2	500	653	23,1	39,2	5,5	4,0	1000	400/50	3	11	160	2030 x 680 x 1400	250/551
4116022862	CPRD 6500 NS39 FT	2	500	653	23,1	39,2	5,5	4,0	1000	400/50	3	11	160	2030 x 680 x 1400	250/551




The ultimate silenced reference in car service

Silent compressors
Cast iron compressors

Top performance workshop comfort

- Silenced units with sound proof cabinet, and cast iron units running at low speed
- Safety first: fire proof insulating foam on canopy units, and metal belt guard on cast iron units
- Easy maintenance: immediate access to all mechanical and electrical components
- Enhanced tools efficiency and reliability with air flow designed for optimal air temperature

Suited for 2 / 3 operators

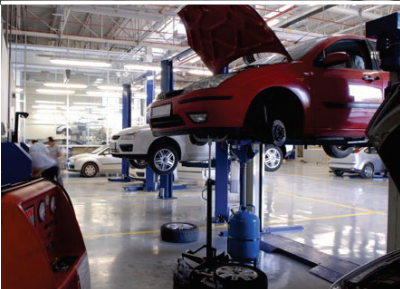


Impact wrench 3/4 CP9560

CPRS 4270 NS29S FT

Partnumber 4116007225

Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Silent
Vessel size	270l



Easy maintenance



Ease of use




Safe and silent




CPRK VE2 4270 FT

Partnumber 4116023050

Technology	Piston 10 bar
Use	Intensive
Air quality	Standard
Noise level	Low
Vessel size	270l



Robust and reliable



Low speed, low wear



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	dB(A)	kg/Lb
4116007214	CPRS 40 NS29S FT	2	0	514	18,1	30,8	4,0	3,0	1450	400/50	3	11	160	945 x 760 x 960	68	170/375
4116007225	CPRS 4270 NS29S FT	2	270	514	18,1	30,8	4,0	3,0	1450	400/50	3	11	160	1600 x 630 x 1530	68	238/525
4116023050	CPRK VE2 4270 FT	1	270	509	18,0	30,5	4,0	3,0	600	400/50	3	10	145	1500 x 550 x 1080	75	173/381



For accurate tire servicing

Belt driven 2 stage compressors Baseplate compressors


Performant units for all your car tire applications

- Performant air and higher pressure with large dual compression pumps
- Enhanced tools efficiency and reliability with aluminium aftercooler, and extra intercooler on NS39 and NS59S pump
- Longer compressor lifetime due to less wear and heath: low running motor speed
- Easy maintenance: quick filter cleaning and replacement, and oil sight glass
- Safety first with the clear and userfriendly pressure switch and metal belt guard

Suited for 1 / 2 operators



Impact wrench CP7778




Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	kg/Lb
4116022863	CPRD 8270 NS39 FT	2	270	827	29,2	49,6	7,5	5,5	1250	400/50	3	11	160	1520 x 590 x 1260	210/462
4116022864	CPRD 8270 NS39 MT	2	270	827	29,2	49,6	7,5	5,5	1250	400/50	3	11	160	1520 x 590 x 1260	210/462
4116022865	CPRD 8500 NS39 FT	2	500	827	29,2	49,6	7,5	5,5	1250	400/50	3	11	160	2030 x 680 x 1400	280/617
4116022866	CPRD 8500 NS39 MT	2	500	827	29,2	49,6	7,5	5,5	1250	400/50	3	11	160	2030 x 680 x 1400	280/617
4116022867	CPRD 8270 NS59S MT	2	270	950	33,5	57,0	7,5	5,5	750	400/50	3	11	160	1520 x 590 x 1260	210/462
4116022868	CPRD 8270 NS59S FT	2	270	950	33,5	57,0	7,5	5,5	750	400/50	3	11	160	1520 x 590 x 1260	210/462
4116022871	CPRD 8500 NS59S MT	2	500	950	33,5	57,0	7,5	5,5	750	400/50	3	11	160	2030 x 680 x 1400	290/639
4116022872	CPRD 8500 NS59S FT	2	500	950	33,5	57,0	7,5	5,5	750	400/50	3	11	160	2030 x 680 x 1400	290/650
4116022884	CPRD 6270 B5900 VS	2	270	653	23,1	39,2	5,5	4,0	1400	400/50	3	11	160	850 x 970 x 2100	210/462
4116000161	CPRF 80 NS59S BTT	2	0	950	33,5	57,0	7,5	5,5	750	400/700/50	3	11	160	1090 x 640 x 810	130/287
4116000163	CPRF 80 NS59S BFT	2	0	950	33,5	57,0	7,5	5,5	750	400/700/50	3	11	160	1100 x 640 x 800	130/287

CPRD 8500 NS59S FT

Partnumber 4116022872

Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	500l

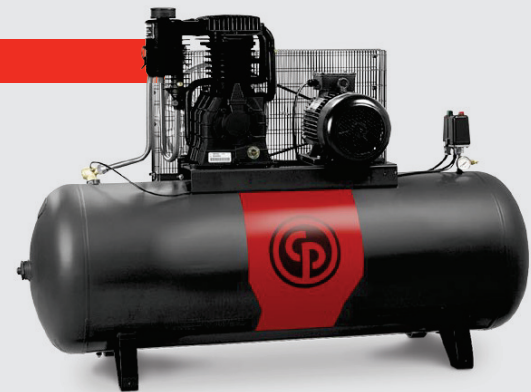

Silencing and easy maintenance



Lower air temperature enhances tools efficiency



Safe comfort



CPRD 6270 B5900 VS

Partnumber 4116022884

Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Standard
Vessel size	270l



Space efficiency



Safe and user-friendly


For silent accurate tire servicing

Silent compressors
Cast iron compressors

Top car tire service comfort

- Silenced units with sound proof cabinet, and cast iron units running at low speed
- Safety first: fire proof insulating foam on canopy units, and metal belt guard on cast iron units
- Easy maintenance: immediate access to all mechanical and electrical components
- Enhanced tools efficiency and reliability with air flow designed for optimal air temperature

Suited for 2 / 3 operators

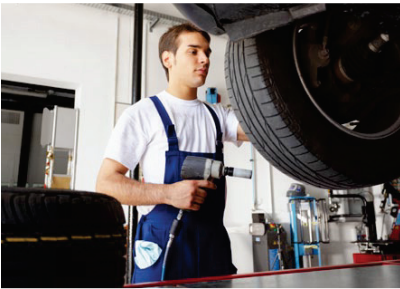

Ratchet wrench CP7830HQ



Partnumber	Type	Comp.	Liters	l/m	cfm	m3/h	HP	kW	rpm	volt/Hz	phase	bar	psi	L x W x H (mm)	Start	Db(A)	kg/Lb
4116007219	CPRS 60 B5900B FT	2	0	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	945 x 760 x 960	dol	68	177/390
4116007221	CPRS 60 B5900B FT Y	2	0	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	945 x 760 x 960	sds	68	181/399
4116007226	CPRS 6270 B5900B FT	2	270	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	1600 x 630 x 1530	dol	68	238/546
4116007227	CPRS 6270 B5900B FT Y	2	270	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	1600 x 630 x 1530	sds	68	248/555
4116007228	CPRS 6500 B5900B FT	2	500	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	2020 x 1000 x 1600	dol	68	302/666
4116007229	CPRS 6500 B5900B FT Y	2	500	653	23,1	39,2	5,5	4,0	1370	400/50	3	11	160	2020 x 1000 x 1600	sds	68	306/675
4116007215	CPRS 80 B6000 FT	2	0	827	29,2	49,6	7,5	5,5	1400	400/50	3	11	160	1270 x 780 x 890	dol	68	234/516
4116007222	CPRS 80 B6000 FT Y	2	0	827	29,2	49,6	7,5	5,5	1400	400/50	3	11	160	1270 x 780 x 890	sds	68	240/591
4116007230	CPRS 8500 B6000 FT	2	500	827	29,2	49,6	7,5	5,5	1400	400/50	3	11	160	2020 x 1000 x 1600	dol	68	404/891
4116007231	CPRS 8500 B6000 FT Y	2	500	827	29,2	49,6	7,5	5,5	1400	400/50	3	11	160	2020 x 1000 x 1600	sds	68	406/904
4116023051	CPRK VE2 6270 FT	1	270	753	26,6	45,2	5,5	4,0	840	400/50	3	10	145	1690 x 533 x 988	dol	75	206/454
4116023142	CPRK VE2 6270 FT Y	1	270	753	26,6	45,2	5,5	4,0	840	400/50	3	10	145	1690 x 533 x 988	sds	75	206/454
4116023052	CPRK VE2 6500 FT	1	500	753	26,6	45,2	5,5	4,0	840	400/50	3	10	145	1971 x 60 x 1110	dol	75	275/606
4116023143	CPRK VE2 6500 FT Y	1	500	753	26,6	45,2	5,5	4,0	840	400/50	3	10	145	1971 x 60 x 1110	sds	75	275/606

CPRS 6270 B5900B FT

Partnumber 4116007226


Technology	Piston 11 bar
Use	Intermittent
Air quality	Standard
Noise level	Silent
Vessel size	270l



Easy maintenance



Ease of use




Safe and silent




CPRK VE2 6270 FT

Partnumber 4116023051



Robust and reliable



Low speed, low wear

Technology	Piston 10 bar
Use	Intensive
Air quality	Standard
Noise level	Low
Vessel size	270l